


YS2-14型(卡扣式) 2T-7T  
YS2-14 TYPE

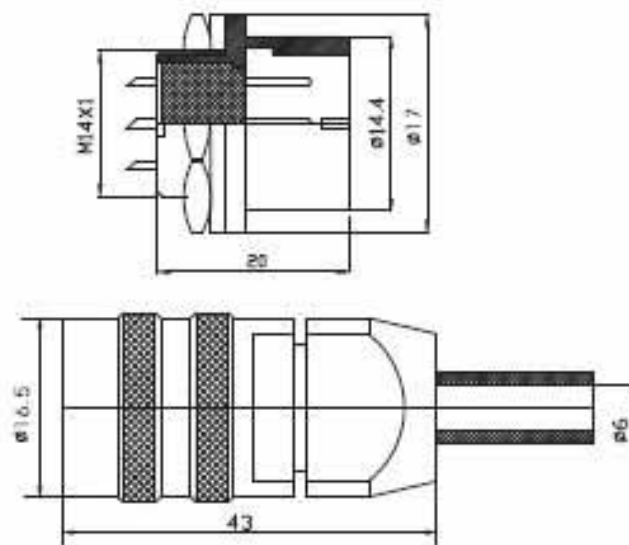

外形尺寸 Shell size	YS2-14-2	YS2-14-3	YS2-14-4	YS2-14-5	YS2-14-7
	正装 反装	正装 反装	正装 反装	正装 反装	正装 反装
接触对排列分布 从针的方向看 Contact Arrangements Comply with the needle direction					
额定电流 Current rating	5A	5A	5A	5A	5A
额定电压 Withstand voltage	AC200V a minute	AC200V a minute	AC200V a minute	AC200V a minute	AC200V a minute
绝缘电阻 Insulation resistance	>500MΩ	>500MΩ	>500MΩ	>500MΩ	>500MΩ
接触电阻 Contact resistance	<3MΩ	<3MΩ	<3MΩ	<3MΩ	<3MΩ