


規格

項目 / 型號		YM15T1	YM16T1
額定電壓		125/250V AC	250V AC
額定電流		15A	16A
洩漏電流		2.3mA MAX 250V,50HZ	2.3mA MAX 250V,50HZ
耐電壓	線對線	1450V DC	1450V DC
	線對地	2250V DC	2250V DC
絕緣阻抗		100M ohm MIN 250VDC	100M ohm MIN 250VDC
直流阻抗		0.5 ohm MAX	0.2 ohm MAX
溫度上升		30C MAX	30C MAX
溫度使用範圍		-25 ~ +85C	-25 ~ +85C
CX		2uF	2uF
CY		10000pF	10000pF
電阻		200K/ohm	200K/ohm
電感值		3.6mH	3.6mH
衰減量	NORMAL MODE 25dbMIN	0.60 ~ 45MHZ	0.80 ~ 50MHZ
	COMMON MODE 25dbMIN	0.10 ~ 40MHZ	0.20 ~ 50MHZ

3.衰減量


COMMON MODE (LINE TO GROUND) IN 50 OHM SYSTEM							
TYPE	CURRENT	FREQUENCY-MHZ					
	RATING	0.15	0.5	1.0	5.0	10.0	30.0
YM15T1	15A	27	37	40	51	63	42
YM16T1	16A	29	38	39	45	52	21
DIFFERENTIAL MODE (LINE TO LINE) IN 50 OHM SYSTEM							
YM15T1	15A	27	39	42	59	53	41
YM16T1	16A	28	39	44	48	49	28

4.線路圖

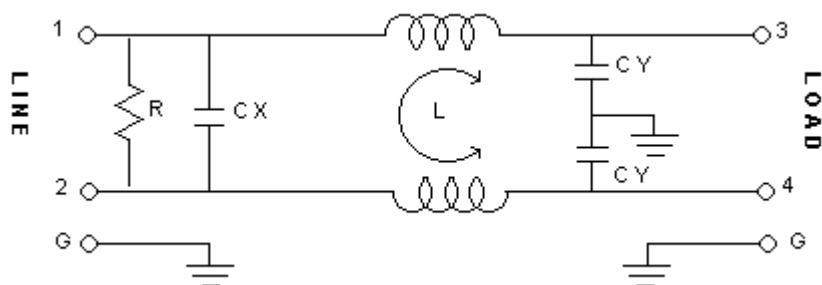


5. 尺寸圖

YM15T1

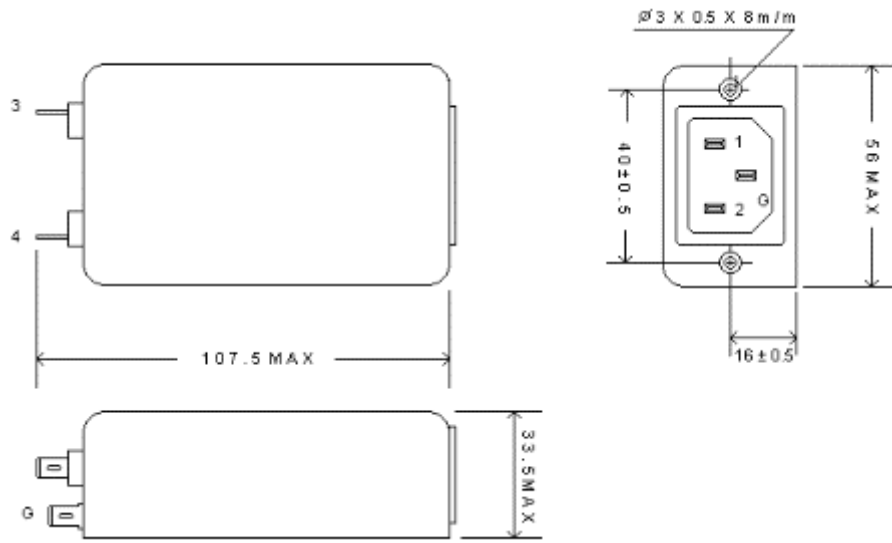

YM16T1

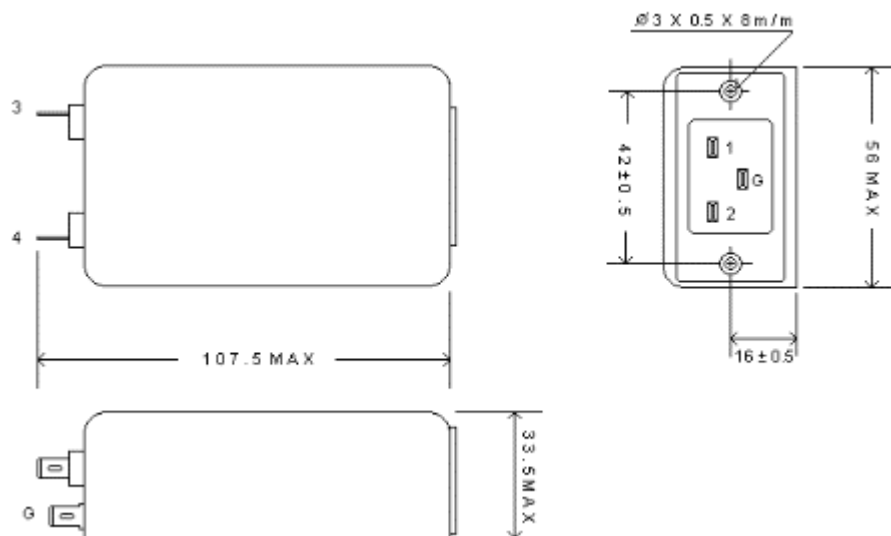

大豪电子
电话: 0755-83233025
<http://www.szdahao.com>
<http://www.very-tec.com>