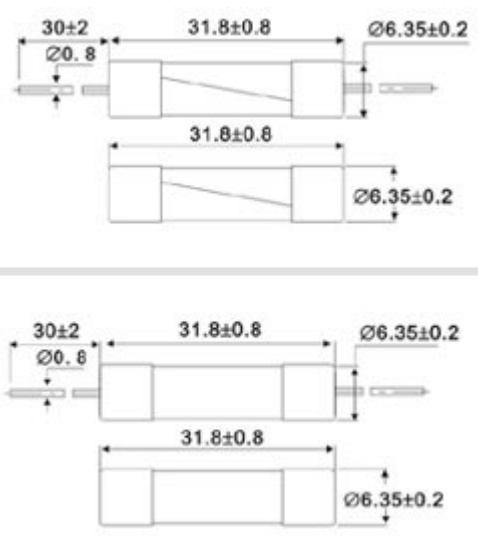


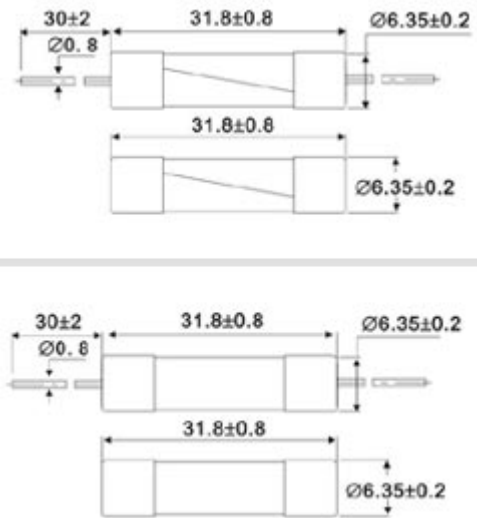
6\*30 6F 欧规、玻璃管、低分断、快熔断

| 測試電流 Testing current   | 熔斷時間 Blow Time                   |        |
|--|----------------------------------|--------|
|  | Min 最小                           | Max 最大 |
| 150%   | 1hour                            | /      |
| 210%   | 100ms                            | 60s    |
| 275%   | 20ms                             | 3s     |
| 400%   | 8ms                              | 1s     |
| 1000%  | /                                | 150ms  |
|  | <b>Breaking Capacity 分斷能力</b>    |        |
|  | 35A or 10In whichever is greater |        |
|  | <b>Material 材料</b>               |        |
|  | Fuse body –glass tube            |        |
|  | End cap--nickel plated brass     |        |
| Pigtail--tin plated copper on nickel plated brass cap                              |                                  |        |

Approvals 认证 (○ Pending ● Approvals)

| 額定電流 Current Rating | 額定電壓 VoltageRating | 認證 Approvals  |   |
|---------------------|--------------------|---|---|
|                     |                    |  |  |
| 8A                  | 250V               | ●   | ○   |
| 10A                 | 250V               | ●   | ○   |
| 12.5A               | 250V               | ●   | ○   |
| 16A                 | 250V               | ●   | ○   |

6\*30 6S 美规、玻璃管、低分断、慢熔断

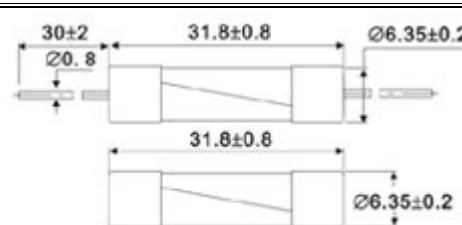
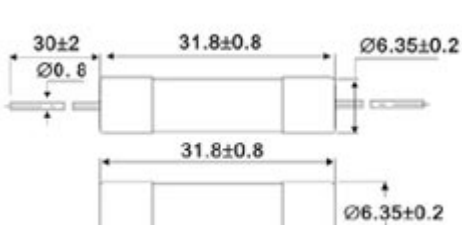
| 測試電流 Testing current   | 熔斷時間 Blow Time                        |        |
|--|---------------------------------------|--------|
|  | Min 最小                                | Max 最大 |
| 100%   | 4hours                                | /      |
| 135%   | /                                     | 1h     |
| 200%   | 200ms                                 | 120s   |
|  | <b>Breaking Capacity 分斷能力</b>         |        |
|  | 10,000 amperes at 125V AC (250mA-15A) |        |
|  | 35 amperes at 250V AC (0-1A)          |        |
|  | 100 amperes at 250V AC (1.1A-3.5A)    |        |
|  | 200 amperes at 250V AC (3.6A-15A)     |        |
|  | <b>Material 材料</b>                    |        |
| Fuse body –glass tube  |                                       |        |
| End cap--nickel plated brass   |                                       |        |
| Pigtail--tin plated copper on nickel plated brass cap                              |                                       |        |

Approvals 认证 (○ Pending ● Approvals)




| 額定電流 Current Rating | 額定電壓 Voltage Rating | 認證 Approvals  |   |   |
|---------------------|---------------------|---|---|---|
|                     |                     |  |  |  |
| 250mA               | 125V/250V           | ●   |   |   |
| 300mA               | 125V/250V           | ●   |   |   |
| 315mA               | 125V/250V           | ●   |   |   |
| 350mA               | 125V/250V           | ●   |   |   |
| 400mA               | 125V/250V           | ●   |   |   |
| 500mA               | 125V/250V           | ●   |   |   |
| 600mA               | 125V/250V           | ●   |   |   |
| 630mA               | 125V/250V           | ●   |   |   |
| 750mA               | 125V/250V           | ●   |   |   |
| 1A                  | 125V/250V           | ●   |   | ●   |
| 1.25A               | 125V/250V           | ●   |   | ●   |
| 1.5A                | 125V/250V           | ●   |   | ●   |

|       |           |   |   |   |
|-------|-----------|---|---|---|
| 1.6A  | 125V/250V | • |   | • |
| 2A    | 125V/250V | • |   | • |
| 2.5A  | 125V/250V | • |   | • |
| 3A    | 125V/250V | • |   | • |
| 3.15A | 125V/250V | • |   | • |
| 3.5A  | 125V/250V | • |   | • |
| 4A    | 125V/250V | • |   | • |
| 5A    | 125V/250V | • |   | • |
| 6A    | 125V/250V | • |   | • |
| 6.3A  | 125V/250V | • |   | • |
| 7A    | 125V/250V | • |   | • |
| 8A    | 125V/250V | • |   | • |
| 10A   | 125V/250V | • |   | • |
| 12A   | 125V/250V | • | • | • |
| 15A   | 125V/250V | • | • | • |
| 20A   | 125V/250V |   |   | • |

6\*30 6G 美规、玻璃管、低分断、快熔断

| 測試電流 Testing current  | 熔斷時間 Blow Time                        |        |
|---|---------------------------------------|--------|
|   | Min 最小                                | Max 最大 |
| 100%  | 4hours                                | /      |
| 135%  | /                                     | 1h     |
| 200%  | 100ms                                 | 5s     |
|  | <b>Breaking Capacity 分断能力</b>         |        |
|   | 10,000 amperes at 125V AC (250mA-20A) |        |
|   | 35 amperes at 250V AC (0-1A)          |        |
|   | 100 amperes at 250V AC (1.1A-3.5A)    |        |
|   | 200 amperes at 250V AC (3.6A-20A)     |        |
|  | <b>Material 材料</b>                    |        |
|   | Fuse body –glass tube                 |        |
|   | End cap--nickel plated brass          |        |
| Pigtail--tin plated copper on nickel plated brass cap                               |                                       |        |

Approvals 认证 (○ Pending ● Approvals)

| 額定電流 Current Rating | 額定電壓 Voltage Rating | 認證 Approvals  |   |   |
|---------------------|---------------------|---|---|---|
|                     |                     |  |  |  |
| 250mA               | 125V/250V           | •   |   |   |
| 300mA               | 125V/250V           | •   |   |   |
| 315mA               | 125V/250V           | •   |   |   |
| 350mA               | 125V/250V           | •   |   |   |
| 400mA               | 125V/250V           | •   |   |   |
| 500mA               | 125V/250V           | •   |   |   |
| 600mA               | 125V/250V           | •   |   |   |
| 630mA               | 125V/250V           | •   |   |   |
| 750mA               | 125V/250V           | •   |   |   |
| 1A                  | 125V/250V           | •   |   | •   |
| 1.25A               | 125V/250V           | •   |   | •   |
| 1.5A                | 125V/250V           | •   |   | •   |
| 1.6A                | 125V/250V           | •   |   | •   |
| 2A                  | 125V/250V           | •   |   | •   |
| 2.5A                | 125V/250V           | •   |   | •   |
| 3A                  | 125V/250V           | •   |   | •   |
| 3.15A               | 125V/250V           | •   |   | •   |
| 3.5A                | 125V/250V           | •   |   | •   |
| 4A                  | 125V/250V           | •   |   | •   |
| 5A                  | 125V/250V           | •   |   | •   |
| 6A                  | 125V/250V           | •   |   | •   |
| 6.3A                | 125V/250V           | •   |   | •   |
| 7A                  | 125V/250V           | •   |   | •   |
| 8A                  | 125V/250V           | •   |   | •   |
| 10A                 | 125V/250V           | •   |   | •   |
| 12A                 | 125V/250V           | •   | •   | •   |
| 15A                 | 125V/250V           | •   | •   | •   |
| 20A                 | 125V/250V           | •   | •   | •   |