

BUSHING

AMS3420


AMS3420 rubber bushing is an accessory and it is used for installation of AMS3057A cable clamp, in case that the cable clamp is not operational while bundling the cables.



There are 12 size for AMS3420-3240. The bushing with close nature can be repeated for using.

Example:

In case that AMS3057-12A cable clamp is unable to be clamped while using, it is just because AMS3057-2 is equipped with AMS3420-12 bushing. Thus, for solving such problem, it is merely to replace with small size AMS3420-10 and then to repeat the assembly.

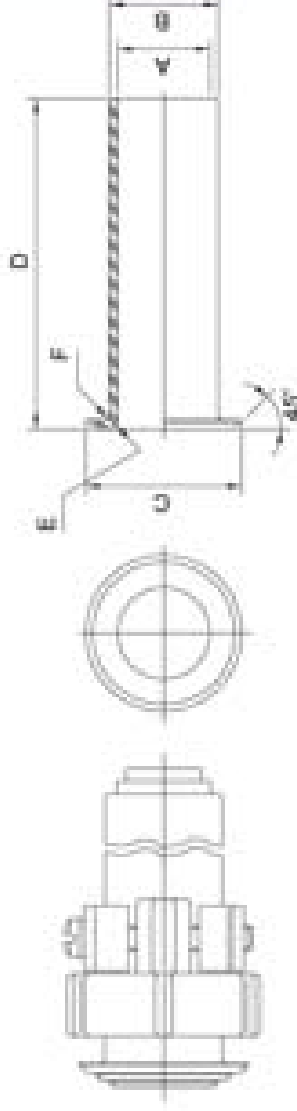

The status of the rubber bushing assembled on AMS3057A cable clamp

Item No.	Inner Diameter Aa ± 0.41	Out Diameter Ba ± 0.41	Ce ± 0.41	Length D ± 0.3	Fr, Fr ± 0.0
AMS3420-3	3.30	5.33	9.63	73.0	0.8
AMS3420-4	5.59	7.67	12.83	69.8	0.8
AMS3420-6	7.92	10.85	15.72	66.7	0.8
AMS3420-8	11.10	14.02	18.90	63.5	1.6
AMS3420-10	14.27	15.62	22.07	60.3	1.6
AMS3420-12	15.89	18.80	27.03	57.2	1.6
AMS3420-16	19.05	23.55	33.38	54.0	1.6
AMS3420-20	23.80	31.50	40.54	50.8	1.6
AMS3420-24	31.75	34.67	46.91	47.6	1.6
AMS3420-28	34.92	41.00	52.96	44.4	1.6
AMS3420-32	41.25	47.35	59.31	41.3	1.6
AMS3420-40	47.60	60.05	72.01	38.1	1.6